



AMAZONE

Trailed sprayer **UG**



UG trailed sprayers

Modern and reliable!



The 2,200 and 3,000 litre UG trailed sprayer is characterised by its robust and operator-friendly design. With the Super-S2 boom in working widths from 15 to 28 m, the UG is an extremely high output sprayer.



UG

Successful in every field!

	Page
The advantages at a glance	4
The technology Chassis	6
The technology Steering	8
The technology Layout and pumps	10
The technology Rinsing water tank Induction bowl	12
Control AmaSpray ⁺ ProfiClick	14
Control ISOBUS	16
Control Comfort-Pack Boom Profile	24
Booms Super-S2	26
Booms Folding	28
Plant protection management	30
DUS Boundary nozzle switching	32
Optional equipment	34
Technical data	36

UG trailed sprayers



15 m – 28 m



2,200 l – 3,000 l



up to 11 part-width
sections



250 or 370 l/min
pump capacity

The advantages at a glance:

- + High ground clearance, with smooth underbelly frame
- + Robust construction in a lightweight design
- + Lightweight spray agent tank with favourable centre of gravity, made from glass fibre reinforced plastic
- + Sprayer boom in a super-light, super-strong and super-compact profile design
- + Outstanding boom suspension ensures a smooth boom ride
- + Efficient, maintenance-friendly, run-dry safe and self-priming piston diaphragm pump
- + Induction bowl with venturi for quick, safe and accurate operation
- + Operator-friendly control valves



MORE INFORMATION

www.amazone.net/ug



DOWNLOADS
mySprayer App



SMARTLEARNING
[www.amazone.net/
smartlearning](http://www.amazone.net/smartlearning)

Greater robustness for higher outputs

UG – the tough one

- ✔ UG 2200:
2,400 l actual volume with 280 l fresh water tank
- ✔ UG 3000:
3,200 l actual volume with 400 l fresh water tank
- ✔ Super-S2 boom:
15, 16, 18, 20, 21, 24, 25, 27 and 28 m
- ✔ UG Special with a 250 l/min single pump
UG Super with 370 l/min twin pump



UG 2200 Special
with Super-S2 boom in 21 m working width



Robust, stable and reliable

The wide, profile steel frame, compact tank and the robust boom technology all contribute to the required reliability. All the edges are rounded off and all hoses are neatly routed inside the frame.



Chassis of choice

The width adjustable axle can be specified unbraked or equipped with a dual-circuit compressed air, or hydraulic braking system, as required. The track width can be infinitely adjusted to between 1.50 and 2.25 m.

Soil protection and plant protection whilst in the field

Selection of the right tyres is of the utmost importance if the soil is to be protected during work.

AMAZONE mudguards can be adjusted for the various tyre options. The mudguard equipment option includes a large canister holder to the right hand side as standard.




For any hitch point, the right drawbar

SelfTrail and UniTrail steering systems react directly to the steering action of the tractor. The following sprayer axle oversteers by a little when coming in into the turn. The tracking quality is completely independent from forward speed.



SelfTrail drawbar steering


A simple, sturdy drawbar is provided that gives continuous track following operation.

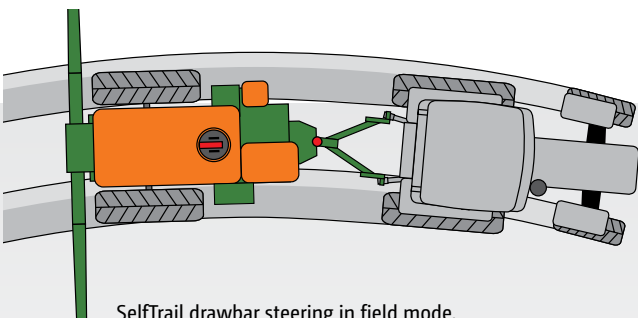

SelfTrail drawbar steering in field mode.

UniTrail drawbar steering

The UniTrail steering system can be quickly converted ready for road transport. Optionally, a hydraulic drawbar steering is available for when working across slopes.

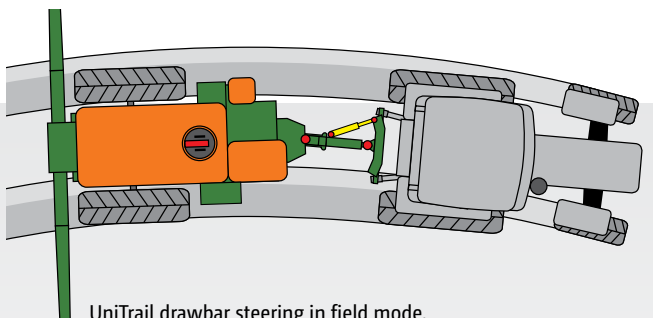

UniTrail drawbar steering in field mode.

Quick on the road – Excellent in the field!

AutoTrail steering systems are software-controlled and can be calibrated precisely to give near-perfect track following. In work, the steering system can either be manually overridden or switched off via the AmaPilot⁺ multi-function joystick.



Straight drawbar




Hitch drawbar


AutoTrail drawbar steering

AutoTrail drawbar steering is available for both the straight drawbar and the hitch drawbar. A variety of towing eyes offer a solution to all tractor drawbar options.

As an alternative to the automatic slope correction adjustment with AutoTrail, there is, on this drawbar, also a manual hydraulic drawbar steering system for when working across undulating terrain.

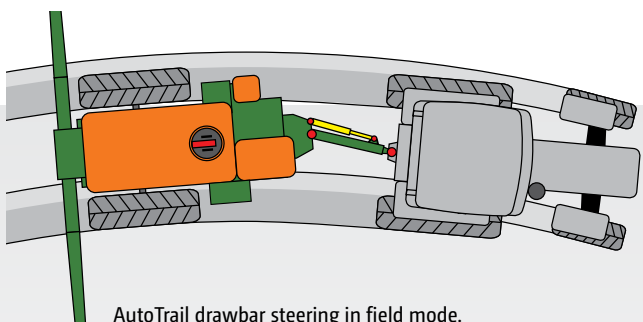

AutoTrail drawbar steering in field mode.

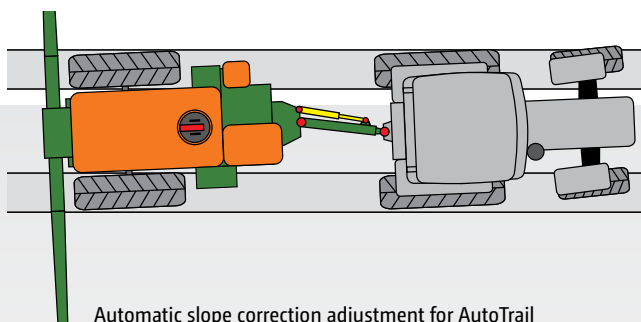

Automatic slope correction adjustment for AutoTrail

Proven technology for the most arduous of operations




- 1) Robust wide profile steel frame in which all hoses are routed for maximum protection.
- 2) Compact tank with smooth internal and external walls.
- 3) Induction bowl with venturi for the induction of large quantities of chemicals and for canister flushing.
- 4) Large fresh water tank for diluting any residues and for cleaning the sprayer, even when the tank is full.
- 5) Separate hand-wash tank with a capacity of 20 l.
- 6) Direct fill level indicator with float and also electronically in the in-cab terminal as standard.
- 7) Optional clothing locker for personal protection clothing.

✓ Clearly laid out operator station

All the controls are logically and unmistakably arranged directly to the front left-hand side of the sprayer. All the spraying functions can be quickly and intuitively understood thus preventing any operator errors.



The suction filter can be easily accessed via the simple AMAZONE bayonet coupling without the loss of spray liquid.

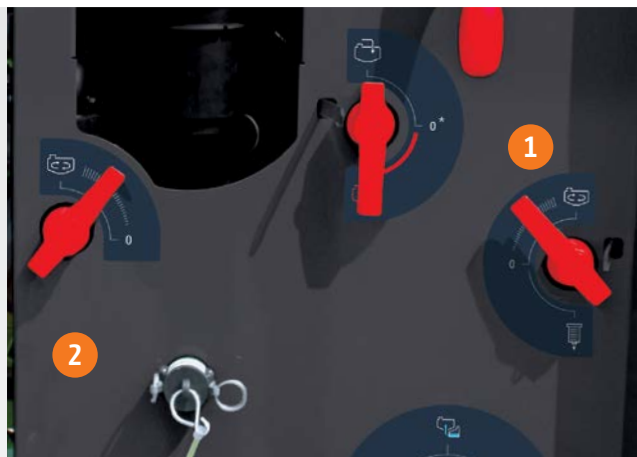

On AMAZONE sprayers, the backflow from the self-cleaning pressure filter is used for agitation (switching via Pos. 1). The pump equipment on the UG Super is suitable for high agitation outputs at low PTO shaft speeds (switching via Pos. 2).

Piston diaphragm pumps

The piston diaphragm pumps are particularly reliable, have run-dry protection and are safe for liquid fertiliser. The multiple-cylinder design of the pumps simultaneously ensures an even delivery with a high suction force and smooth operation. The pumps are available with delivery capacities of 250 l/min (Special) or 370 l/min (Super). The 370 l/min pump setup is a tandem pump, where the spraying pump works together with a separate agitation pump. The tandem pump is ideal for farms using high application rates.



Hydraulic agitation intensity

The intensity of the hydraulic agitator can be steplessly reduced down to nothing in order to avoid any foaming of the crop protection agent or to facilitate spraying out the remaining tank contents.


On AMAZONE sprayers, the backflow from the self-cleaning pressure filter is used for agitation (1). The pump equipment of the UG Super is suitable for high agitation outputs at low PTO shaft speeds (2).

Fill capacity 400 l/min

The sprayer can be filled with the help of a suction hose (3") with non-return valve or bowser fill connection with C-coupling. Utilising the additional injector that can be activated, means that filling rates of up to 400 l/minute can be achieved.



Filling via the suction hose

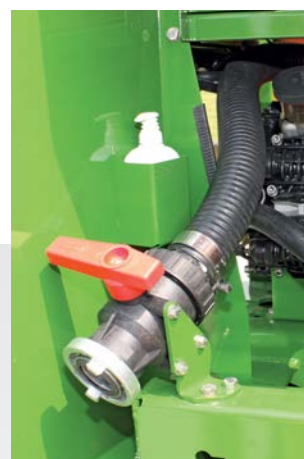

Bowser filling
(C coupling or Camlok coupling)

AMAZONE application technology



🔒 Play it safe with the AMAZONE induction bowl.



Fresh water tank with Vario control for flushing and diluting

The large fresh water tank always carries sufficient clean water for flushing and for diluting residual quantities. If the Vario control is set to the “flush” position, the suction filter, pump, valve chest, boom spray line and nozzles are cleaned with fresh water.

This is also possible when the spray liquid tank is full. This rules out the possibility of malfunctions caused by dried on spray liquid.

Inducting via the induction bowl and venturi

The induction bowl is able to quickly and reliably dissolve powdered agents and large quantities of urea through the incorporated rinse ring and, at the same time, to quickly flush them in with the power injector.

A rotary nozzle ensures that the spraying agent canisters are easily and conveniently cleaned to make full use of the contents. The closed induction bowl can be flushed for self-cleaning. The fill level indicator is always in view.

Internal and external cleaning

Two high-capacity rotating nozzles clean the internal walls of the tank. As an option, the outside of the boom can be cleaned in the field with the external wash kit.

A spray lance with a working pressure of 10 bar ensures effective cleaning.




AmaSpray⁺ in-cab terminal

AmaSpray⁺ – simple and versatile

AmaSpray⁺ enables the simple yet fully automatic control of the UG. Switches integrated into the operator terminal enable the control of 5, 7 or 9 part-width sections. The AmaSpray⁺ has a digital pressure display and a digital tank level indicator. It records the quantity applied and area worked. The hydraulic functions are operated using the spool valves on the tractor. Boom tilt and pendulum lock are also displayed in the AmaSpray⁺. As an option, AmaSpray⁺ enables one-sided folding of the boom or, alternatively, access to the boundary and end nozzle spraying systems.

The AmaSpray⁺ operator terminal with serial interface can also be used for automatic documentation (ASD) and part area application.

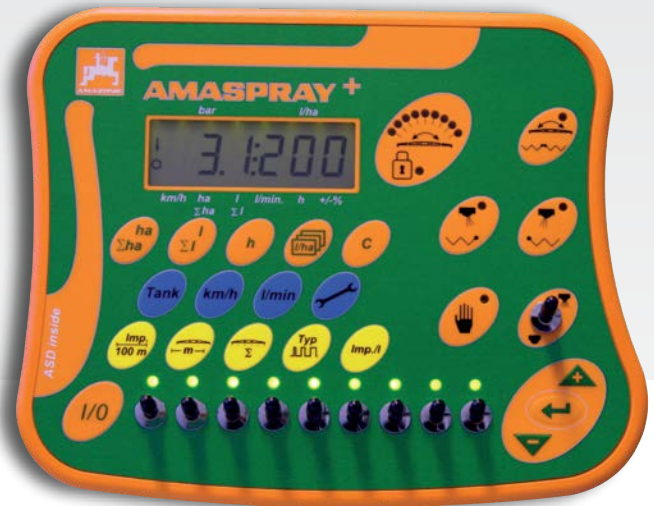

The benefits:

- ✔ Single, high-contrast, backlit screen
- ✔ Main control valve and part-width section control
- ✔ Up to 9 part-width sections
- ✔ Digital pressure indication
- ✔ Digital fill-level indicator
- ✔ Display of the boom position and lock status
- ✔ Hectare meter (total and daily areas covered)
- ✔ +/- 10% key
- ✔ Field record management system

Additional functions (with optional equipment):

- ✔ Pre-select fold for independent boom folding
- ✔ End nozzle control or boundary nozzle control (as an alternative to pre-select fold)
- ✔ Fold or tilt via 1 double-acting spool valve (electro-hydraulic changeover valve)
- ✔ ASD inside: serial interface for documentation and GPS terminal versatility



Electrically-controlled TG valve chest

Cutting-edge valve technology is available for ISOBUS control and the AmaSpray⁺. The part-width boom sections are quickly switched on and off without drips via electric motor valves with pressure relief.

The amount applied is accurately and directly controlled by the in-cab terminal in all situations. An equal pressure compensation system is not required with this system.

ProfiClick

The small switchbox
with a huge comfort factor



✓ ProfiClick mounts conveniently on the AmaSpray⁺

For boom control and steering

The ProfiClick switchbox offers the simple and precise actuation of all hydraulic functions of the booms and steering with AMAZONE crop protection sprayers.

It is available in combination with the electro-hydraulic "Profi-fold 1". All the operational functions of the ProfiClick switchbox are ergonomically arranged and directly linked with a function. The potentiometer for adjusting the boom tilt or for the automatic steering of a trailed sprayer can be controlled on the move without looking thanks to the detent position in the centre. So the driver can concentrate perfectly on driving.

The ProfiClick control box for operating the hydraulic functions of an AMAZONE sprayer can be combined with the AmaSpray⁺ machine terminal or any ISOBUS terminal. Thus it offers a cost-effective and comfortable control of the hydraulic functions via an oil circuit. On the tractor, only one single acting spool valve with a pressure-free return flow is required.



✓ ProfiClick switchbox without steering
– Actuation of the boom functions via the oil circuit




✓ ProfiClick switchbox with steering
– Actuation of the boom functions and the steering for true track following via the oil circuit

- ① Ergonomic hand support
- ② On/off
- ③ Boom pendulum lock
- ④ Boom fold
- ⑤ Boom up/down
- ⑥ Boom tilt

- ① Ergonomic hand support
- ② On/off
- ③ Steering in automatic/manual
- ④ Manual steering
- ⑤ Boom pendulum lock
- ⑥ Boom fold
- ⑦ Boom up/down
- ⑧ Boom tilt

MEMBER OF



ISOBUS as the basis for intelligent communication

One language, many benefits!

Each ISOBUS-enabled machine from AMAZONE comes with the latest technology and almost unlimited possibilities. It makes no difference whether you use an operator terminal from AMAZONE or an ISOBUS terminal fitted directly in the tractor. ISOBUS is an internationally recognised standard for communication between the operator terminal, tractors and connected implements on the one hand and Farm Management Information Systems on the other.

Operation via a wide-range of ISOBUS terminals

Which means that ISOBUS enables you to take control of all your ISOBUS compatible equipment. You only have to connect the machine to the respective ISOBUS terminal and the usual operator interface appears on the monitor in your tractor cab.

Benefits of ISOBUS at a glance:

- ✔ This worldwide standard provides a uniform interface and data exchange format that ensures compatibility even with third party manufacturers
- ✔ Plug and Play between machine, tractor and additional ISOBUS implements



MORE
than ISOBUS

Perfectly developed machine operation from AMAZONE

AMAZONE machinery and operator terminals offer a range of functions which are very easy and safe to operate:

- ✓ Highest compatibility and function flexibility of your ISOBUS equipment
- ✓ No additional modules on the machine side. All ISOBUS machines from AMAZONE come ready-equipped with the necessary ISOBUS functions as standard
- ✓ Practice-oriented machine software and logical menu structure
- ✓ MiniView display with all AMAZONE terminals and additional ISOBUS terminals. See, for instance, the machine data in the map view
- ✓ Possibility of operating the machine via the tractor terminal or a twin terminal solution
- ✓ Flexible assignment of the map and machine view between the tractor terminal and the operator terminal
- ✓ Unique operating concept. Freely configurable displays and individual user interfaces for each driver
- ✓ Useful additional functions such as automatic boom lowering on AMAZONE crop protection sprayers
- ✓ Integrated TaskController data logger function



Clearly-structured AMAZONE machine operation

Advantages of the AMAZONE machine software:

- ✓ User-oriented and intuitive
- ✓ Tailored to the machine
- ✓ Function scope above and beyond the ISOBUS standard

Clear display of the work menu in the AMAZONE machine operation



AmaTron 4 ISOBUS terminal

Full functionality



The AmaTron 4 ISOBUS operator terminal, developed in-house by AMAZONE, enables convenient tablet-style, touch-screen control of any ISOBUS-enabled agricultural machine. AmaTron 4 makes all ISOBUS functionality possible - with added convenience, user-friendliness and overviews. And yet: it performs even better in combination with AMAZONE agricultural machinery and guarantees full functionality when it comes to precision farming.



ROBUSTNESS

STURDY!

- ✓ Low-reflection, 8" display with waterproof and dustproof aluminium housing
- ✓ Rear-mounted hand rest for a secure grip



RELIABILITY

WELL THOUGHT THROUGH!

- ✓ Practical and clear menu navigation for simple and intuitive use
- ✓ Actuation via touch screen or soft keys
- ✓ Simple documentation and job management: work first - then save the data
- ✓ Optional software licences for maximising every opportunity in precision agriculture



COMFORT

COMFORT!

- ✓ App carousel for quick and easy navigation at the swipe of a finger
- ✓ Freely configurable status bar - the most important parameters available at a glance, all of the time
- ✓ The practical quick-start menu allows quick and easy import and export of job data

Extended functionality via licences	Functions in AmaTron 4 for the UG
GPS-Maps&Doc	• Inactive field boundaries and automatic field detection • Documentation via ISOBUS Task Controller or PDF export • Application maps in ISO-XML format and Shape file format • Online data exchange via the AmaTron Share App
GPS-Switch basic	• Section Control with up to 16 part-width sections • Virtual headland • Automatic boom lowering
GPS-Switch pro	• Auto-zoom, obstacle marking
GPS-Track	• Optical parallel guidance aid • Various different track modes
AmaCam	• Display of a camera image on the AmaTron 4 including reverse detection
AmaTron Twin	• Display extension using the AmaTron Twin App

More comfortable machine operation

AmaTron Twin App – extended display for user-friendly operation

The AmaTron Twin App offers the driver even more comfort during work, as GPS functions in the map view can also be displayed on a tablet in parallel with the machine operation on the AmaTron 4.

Advantages of the AmaTron Twin display enhancement:

- ✔ Use of an existing mobile device
- ✔ Greater clarity – every application always in view
- ✔ Comfortable control of the GPS functions in the map view, in parallel, via the mobile device
- ✔ Clear, authentic representation of the working machine and its part-width sections



The AmaTron Twin App



Alternative map views with AmaTron Twin – easily visible display of the machine and its part-width sections, as well as buttons on the right hand side of the mobile device.

AmaPilot⁺ – everything to hand!

Thanks to the AUX-N feature, you can operate multiple functions on the machine via the AmaPilot⁺ or any other ISOBUS multi-function joystick.



Advantages of AmaPilot⁺:

- ✔ Nearly every function is controlled directly via the 3 levels
- ✔ Adjustable palm rest
- ✔ Freely programmable, individual key layout

Workday made easy –

Make the most of the possibilities!

GPS-Maps&Doc with data exchange via the AmaTron Share App



With the GPS-Maps&Doc licence, the AmaTron 4 can gather and document both machine data and georeferenced data via Task Controller (TC).

Part-area, site-specific operation via application maps in either Shape file or ISO-XML format is also possible.

Advantages of GPS-Maps&Doc with the AmaTron Share App:


- ✔ Intuitive system for processing application maps
- ✔ Automatic part-area, site specific regulation of the application rate
- ✔ Indication of inactive field boundaries and automatic field detection when approaching the vicinity
- ✔ Optimum crop management via needs-based application
- ✔ Comfortable import of jobs in ISO-XML or Shape file format and export of completed jobs in ISO-XML format or as a job summary in PDF format via the AmaTron Share App
- ✔ Start a new task straight away and decide later whether the data is to be saved or not

AmaTron Share App – for comfortable data management!

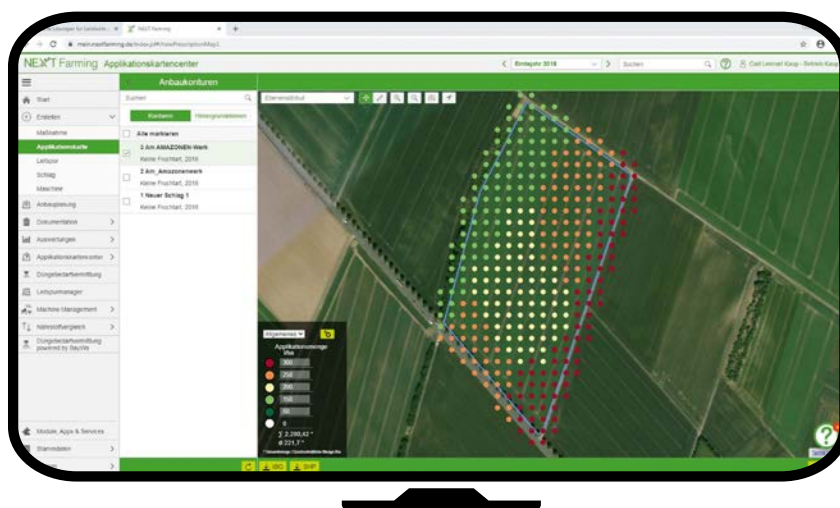

ISO-XML and
shape

ISO-XML and
PDF

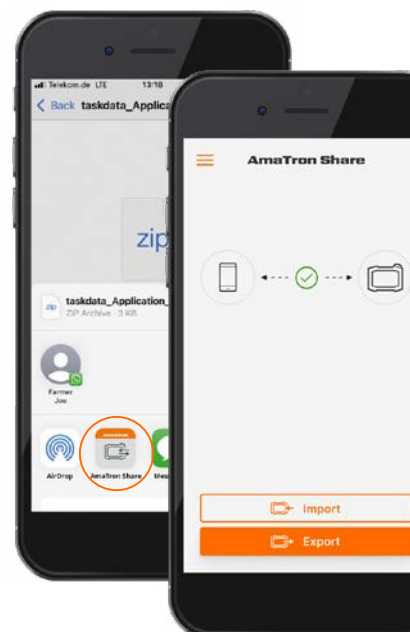

Generation of an application map in a farm management information system for automatic part-area, site-specific control of the application rate via the AmaTron 4



Display of the application map in AmaTron 4



Display of the camera image in the AmaTron 4

GPS-Track

The GPS-Track parallel guidance greatly helps with orientation in the field, especially on grassland or in areas without tramlines.

- ✓ With a virtual light bar in the status bar
- ✓ Automatic tramline control via GPS for seed drills
- ✓ Various track modes such as A-B lines or contour following
- ✓ Optional with AmaTron 4

AmaCam

Software licence for displaying a camera image on AmaTron 4.

- ✓ Automatic display of the camera image on AmaTron 4 when reversing

AmaTron Share App for digital data transfer. Try it now!

The AmaTron Share App, which is connected to the AmaTron 4 via a Wi-Fi hotspot, allows all data to be conveniently transferred online. For example, the App enables application maps to be easily sent from the office to the AmaTron 4 for completion. Job data can also be sent to customers or back to the office as PDF documentation via the cloud, email or messenger services such as WhatsApp after the job has been completed. This is user-friendly data management!




The AmaTron Share App



Automatic part-width section control GPS-Switch

Example: 24 m working width (6-6-8-8-8-6-6 = 48 nozzles)

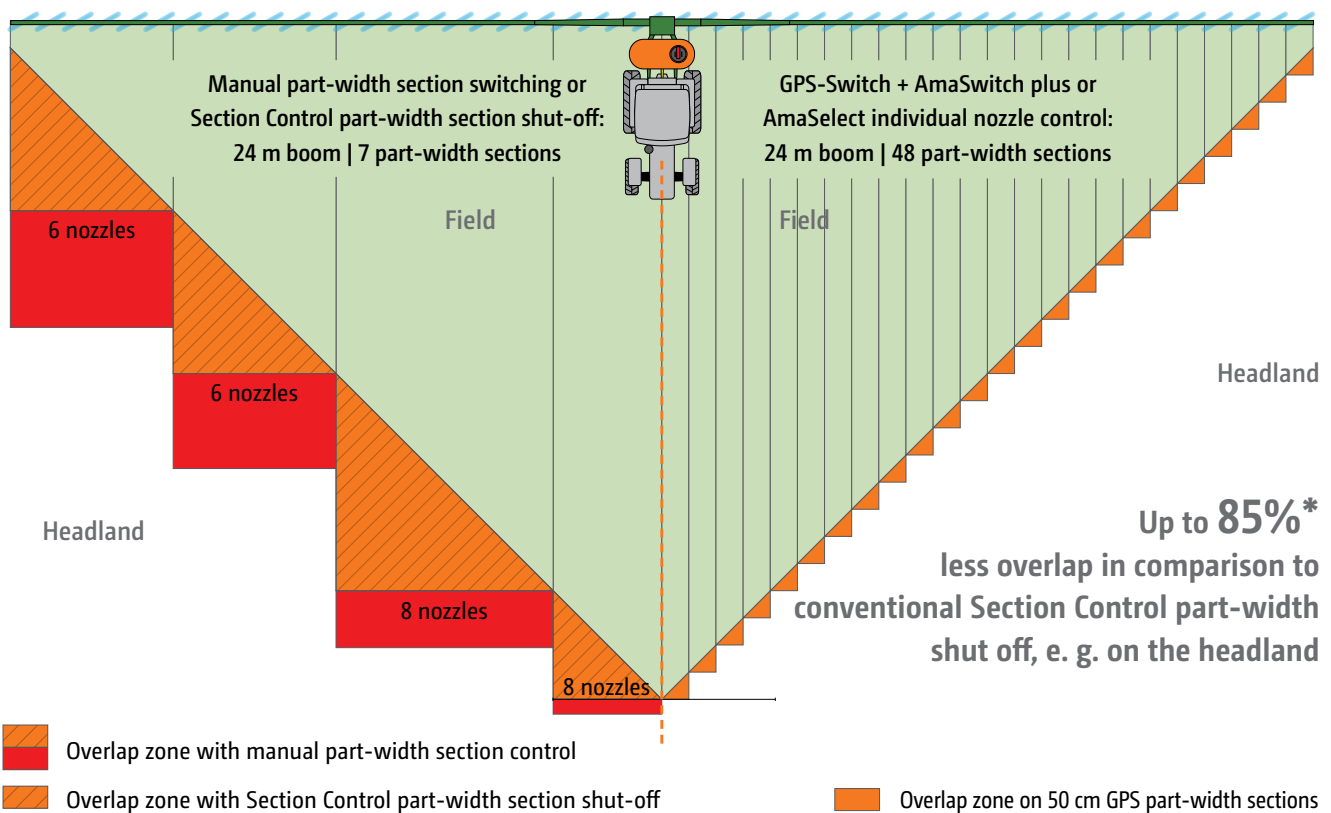

Automatic part-width shut-off on the headland and in wedge-shaped fields **GPS-Switch**

5%*

Saving on crop protection agent usage



Electric individual nozzle control
AmaSwitch plus or AmaSelect

5%*

Additional saving in crop protection agent usage

* Savings are dependent on field shape, boom width and the number of part-width sections

Precise switching with 50 cm part-width sections

The decisive benefit of individual nozzle control is the possibility to operate with small part-width sections giving an even greater degree of accuracy in wedge shaped fields, short work and on the headland. If AmaSwitch plus or AmaSelect is combined with the automatic GPS-Switch part-width section control, automatic switching of individual nozzles in 50 cm part-width sections is possible.

With this system, areas of overlap are significantly reduced and are, in comparison with a conventional Section Control part-width section shut-off system, up to 85% less. So, the combination of GPS-Switch and individual nozzle control results in, depending on field shape and size, the working width and number of part-width sections, significant savings in spray agent compared with a normal spraying system used thus far.

Overlaps on the headland or in wedge shaped fields are prevented via precise switch points with GPS-Switch.



GPS-Switch

If the operating terminal facilitates Section Control, such as GPS-Switch part-width section control from AMAZONE, the part-width sections are activated completely automatically and in relation to the GPS position. Once a field has been created, and then in automatic mode, the driver can concentrate fully on the operation of the towing vehicle, since the part-width sections are switched automatically in wedge shaped fields and on headlands.

Benefits of automatic part-width section control:

- ✓ Stress relief for the driver
- ✓ Increased precision, even at night or at higher speeds
- ✓ Fewer overlaps and gaps
- ✓ Saving inputs
- ✓ Less crop damage and environmental impact

- ❗ “With Section Control, the ISOBUS terminal takes on so much of the work from the driver.”
 (“dlz agrar magazine” – test report ZA-TS fertiliser spreader · 02/2017)

With GPS-Switch, AMAZONE offers GPS-based, fully automatic, part-width section control for all AMAZONE operator terminals and ISOBUS-compatible fertiliser spreaders, crop protection sprayers or seed drills.

GPS-Switch basic

- ✓ Automatic part-width section control with up to 16 part-width sections
- ✓ Creation of a virtual headland
- ✓ Automated boom lowering on AMAZONE crop protection sprayers

GPS-Switch pro (in addition to GPS-Switch basic)

- ✓ Auto-zoom when approaching the headland and obstacle marking

✓ AmaClick

Specialist crops and bed spraying often require the switching on/off of the individual part-width sections in the middle of the boom. AmaClick is an additional ergonomic control unit that can be used either in conjunction with the AmaPilot+ multi-function joystick or also as a standalone system alongside an ISOBUS terminal.



Comfort-Pack for ISOBUS terminals

Operator- and environmentally-friendly



Comfort-Pack

Control of the spray liquid system

The AMAZONE Comfort-Pack controls the most important functions of the liquid system.


- ✔ Automatic fill stop
- ✔ Agitator regulation
- ✔ Automatic, in-cab remote cleaning

The intensity of the hydraulic agitator is, depending on the fill level, reduced until completely shut off to prevent foaming of the crop protection agent or to minimise the residual spray volumes. On AMAZONE crop protection sprayers the unsprayed plant protection agent is delivered back via the return flow into the suction system. In this way, any unintended dilution of the spray liquid is prevented.

An agitation capacity of 370 l/min is available to achieve perfect results, even with difficult mixtures and high concentrations. The 2 interior cleaning nozzles provide an optimum cleaning performance inside the tank. The Comfort-Pack automatically ensures that the agitation will be rinsed.

Minute final residual volumes of less than 6 litres and the large fresh water contents ensure a very effective cleaning procedure whilst still in the field.

AMAZONE aircraft-style boom design

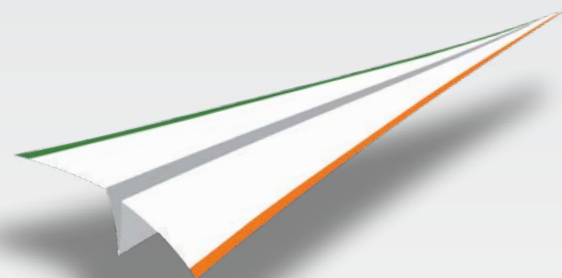

Simultaneously superbly strong and superbly light

Due to the special profile design AMAZONE sprayer booms are very light yet at the same time very robust. Working widths of 15 to 28 metres allow optimum adaptation to the field sizes and topography on the farm with various folding options. The exceptional high quality ensures a long operational life even over very high acreages.



Superbly narrow transport width of only 2.40 m

The Super-S2 boom folds in and out fully automatically using hydraulic cylinders. In the transport position, the boom sits compactly behind the tank with a transport width of only 2.40 m and a transport height of 3.30 m.

With steel profiles up to 140 mm wide with multiple folds, the Super-S2 boom is extremely strong.



Super-S2 boom: firm and steady




3-fold shock absorbed suspension for the most arduous of operational conditions

As standard, all AMAZONE booms are equipped with

- ✓ springs and shock absorber pack for damping the vertical roll movement
- ✓ rubber buffer damping elements with ball suspension to damp down the horizontal yaw movements and
- ✓ tension springs for the shock absorbed suspension of the entire boom.

The hydraulic height adjustment and guide skids also come as standard and ensure precise longitudinal and lateral distribution of the spray agent.

Super-S2 boom suspension

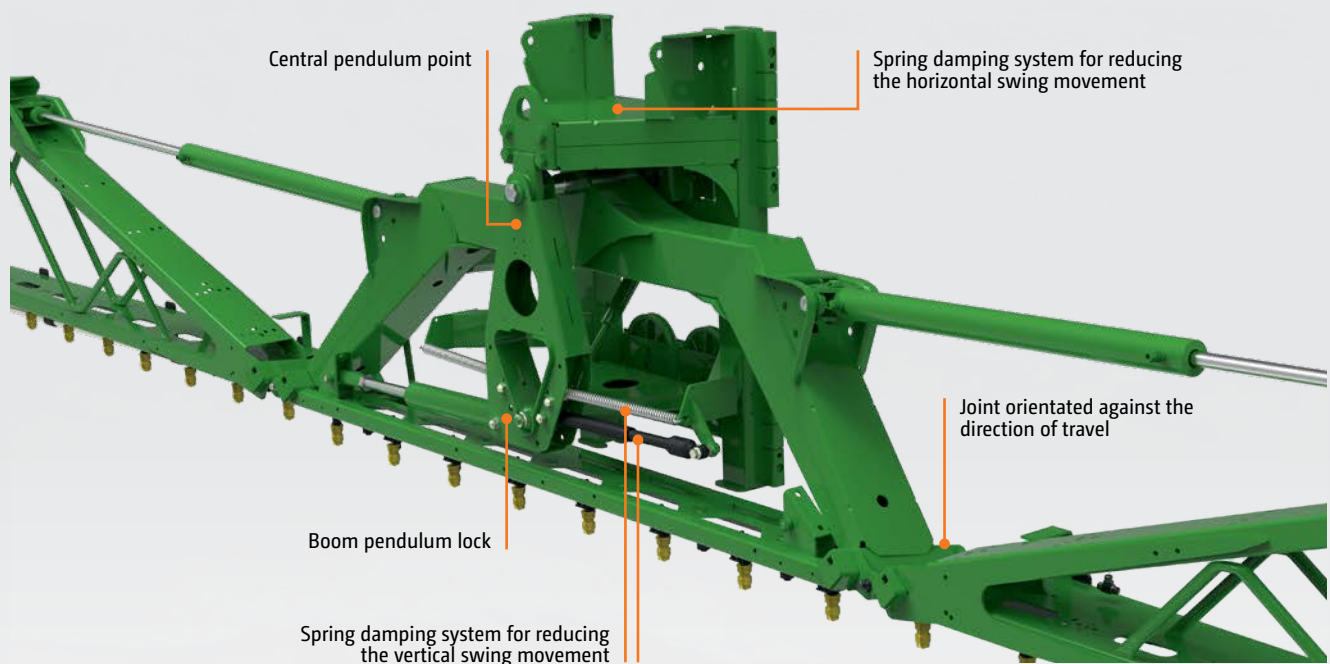



! Practical experience with the Super-S2 boom


“We are delighted with the performance of our record-breaking sprayer: the joints and the entire boom system have not suffered from any fatigue even well after 100,000 hectares of spraying.”

Carin Handriek, Landwirtschaftliches Zentrum Hörstetal e.G., 99880 Mechterstädt

Maintenance-free and with a long service life


The decades of experience in boom design pays off: the conical hinge pin is the intelligent centre of a well thought-out boom philosophy! The boom pivot points self-adjust against any play on the conical hinge pins, thus ensuring an optimal boom function for the operator, even after many years.

The standard use of stainless steel, the use of automotive-industry standard, cathodic dip painting process and the targeted use of plastics and aluminium are the perfect guarantee of a long service life.

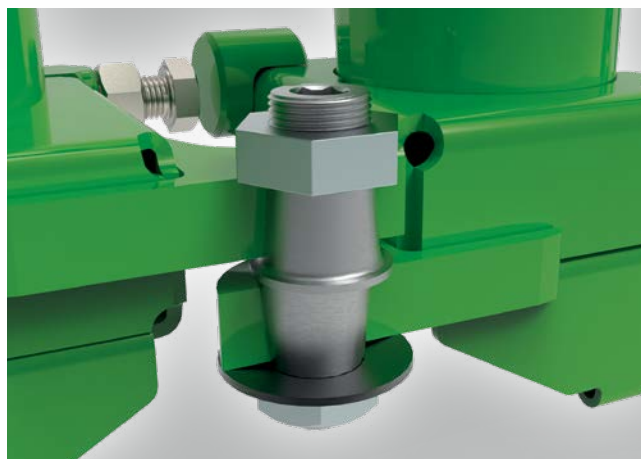

✔ A pivot joint that lasts!

Boom layout and folding variants of the Super-S2 boom

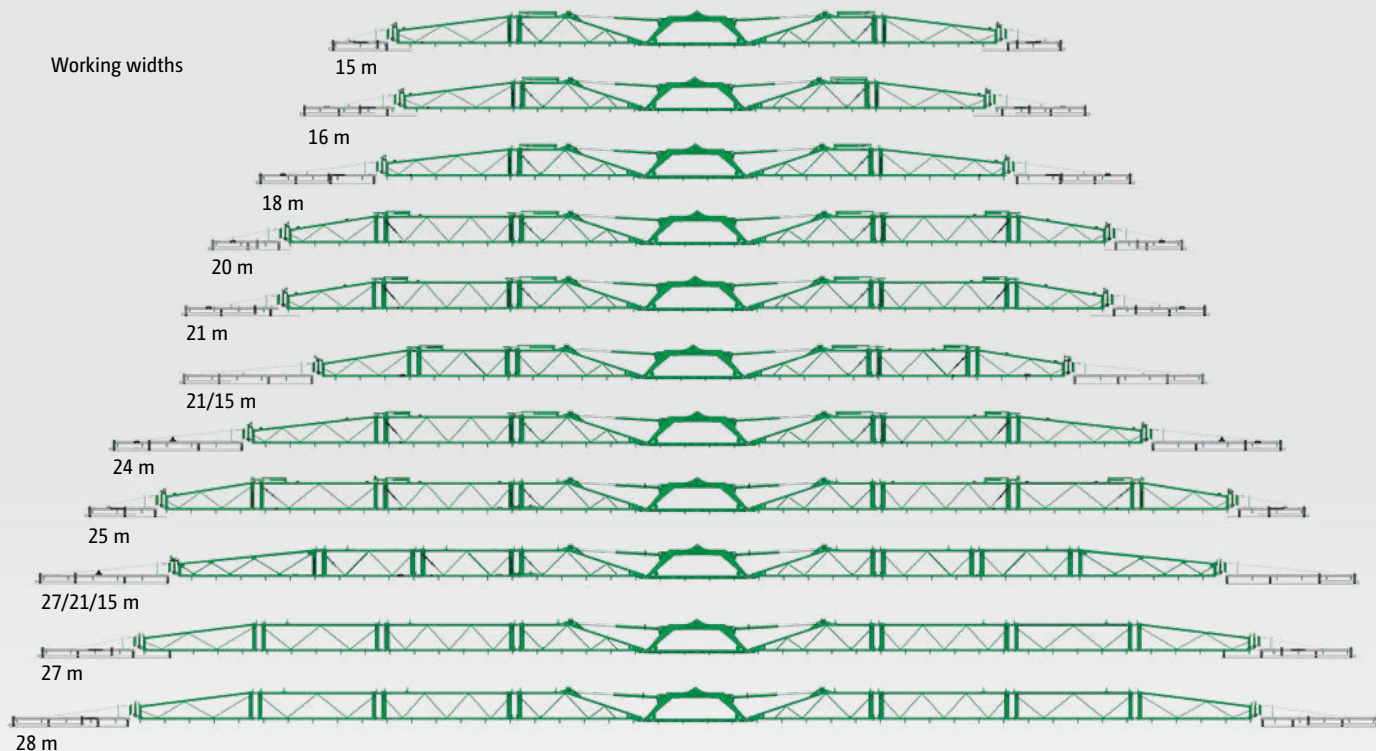

Flexibility thanks to the hydraulic boom folding permutations




✓ Standard folding

All boom options are folded fully hydraulically by oversized hydraulic cylinders.

✓ Hydraulic tilt adjustment


On sloping terrain and with large working widths, the additional hydraulic tilt adjustment with its in-cab tilt display is useful.

Pre-select folding



One-side folding via tractor spool valves is possible with the AmaSpray⁺ or an ISOBUS terminal.

The high level of flexibility offered by the pre-select folding function enables all boom sections to be folded individually.

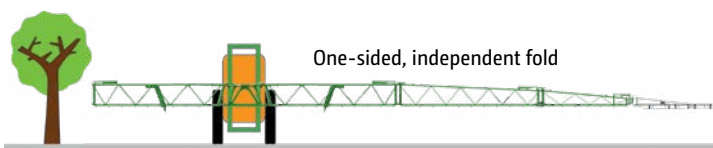

Both the left and right-hand sides can be folded in separately and independently of each other in order to adapt to any circumstances in your fields.

Profi-fold

Profi-fold refers to the electro-hydraulic actuation of the boom via an oil circuit. Height adjustment, folding in and out, independent folding, boom width reduction and tilt

adjustment functions (Profi-fold 1) can be easily controlled via the ISOBUS terminal or the multi-function joystick. Additional boom tip angling is possible with Profi-fold 2.




Profi-fold 2

DistanceControl with 2 sensors or DistanceControl plus with 4 sensors

The DistanceControl fully automated boom guidance system with 2 sensors, or DistanceControl plus with 4 sensors, is possible on all boom variants in conjunction with Profi-fold 1 or Profi-fold 2. If the crop height varies greatly, or there are areas with partially lodged corn, the boom could dip into the crop if equipped with just 2 sensors.

In this case, equipping the boom with four sensors will prevent this. The sensors are electrically connected in parallel and so it is always the sensor that is closest to the target surface that is sensing.

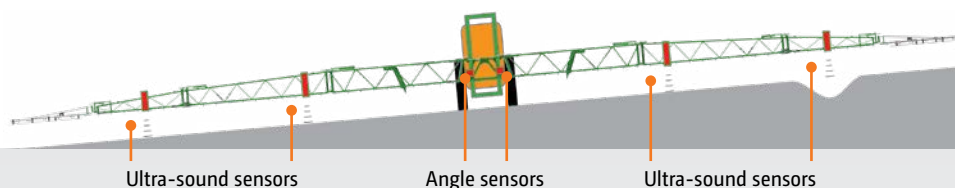

The right nozzle choice

The basis for success in crop protection



Less drift also at higher wind speeds

With the air-assisted injector nozzles, crop protection agents can be applied with very little drift. They are universally usable in all crops and all classifications. Because of the coarse droplet application, these nozzles can also be used in higher wind speeds.

AMAZONE offers a wide range of nozzles from agrotop, Lechler and TeeJet.

Single and multi-nozzle bodies

The nozzle bodies with integrated diaphragm non-return anti-drip valves fit up into the boom profiles reliably preventing any dripping at the nozzle. Self-adjusting bayonet fixings ensure a tool-less quick nozzle change. The triple or quad nozzle bodies are suitable for frequent nozzle changes due to different applications and crops. Nozzle protection tubes, as standard on the outer sections, or, if desired, over the entire boom working width, ensures protection for long injector nozzles and multiple nozzle bodies.





Examples

- 1) Lechler IDN 120-025
- 2) TeeJet XRC 110-025
- 3) Injector flat fan nozzle AirMix 110-04



- ✔ Everyone purchasing an AMAZONE crop protection sprayer receives, free of charge, an AMAZONE nozzle fitting tool that makes for a much easier nozzle change.

Injector nozzles (ID, TTI) have a relatively coarse droplet spectrum and are particularly versatile with regard to their field of application. A pressure range of 2 to 8 bar is possible.

If coverage quality is at the foreground of the application, the use of standard or anti-drift fine droplet nozzles, such as XR or AD, is recommended. Special care is required here due to their tendency to drift above 3 bar.


A good compromise is provided by the modern ID-K or Airmix compact injector nozzles. These have relatively little drift, but do not have too coarse a droplet spectrum and are operated at 2 to 4 bar.

When it comes to special coverage qualities, the double flat fan nozzle is an interesting alternative: the AVI Twin from Agrotop also produces droplets that are not too fine.

The split spray pattern ensures a more even deposit on the front and back of the plant and is an interesting alternative in many applications.


For speeds of more than 10 km/h, the TD HiSpeed nozzle with its asymmetrical spraying angle is becoming a new industry trend.

Distribution of the droplet size

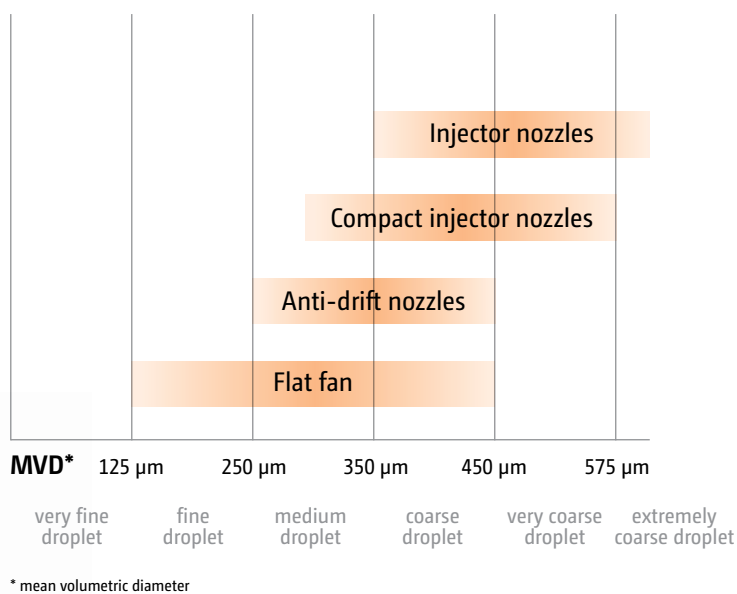

DUS pressure recirculation system

With DUS you set the pace

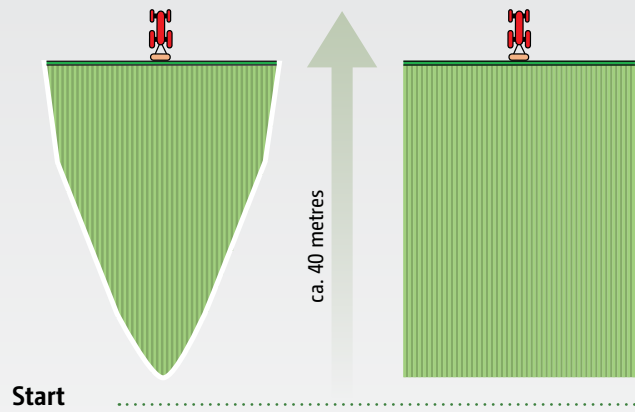

without DUS


with DUS immediate coverage across the full working width

The DUS pressure recirculation system – proven more than 10,000 times

The AMAZONE DUS pressure recirculation system ensures a reliable circulation throughout the entire system. When starting the spraying operation, all the hoses including the spray lines are filled under pressure in the reverse direction with the mixed spray agent. This means the spray lines are always full and immediately ready to use across the entire working width. There is no waiting on the headland.


Every time individual part-width sections are shut off, during the turning operation and during transport, the spray liquid circulates continually thanks to the pressure recirculation system. This reliably prevents deposits, blockages or segregation in the spray lines.

During the cleaning operation, fresh water flushes the spray lines out right up to the nozzles without any spraying being necessary. During this cleaning procedure, the concentrated spray agent is returned back to tank via the pressure recirculation system leaving the spray lines clean.

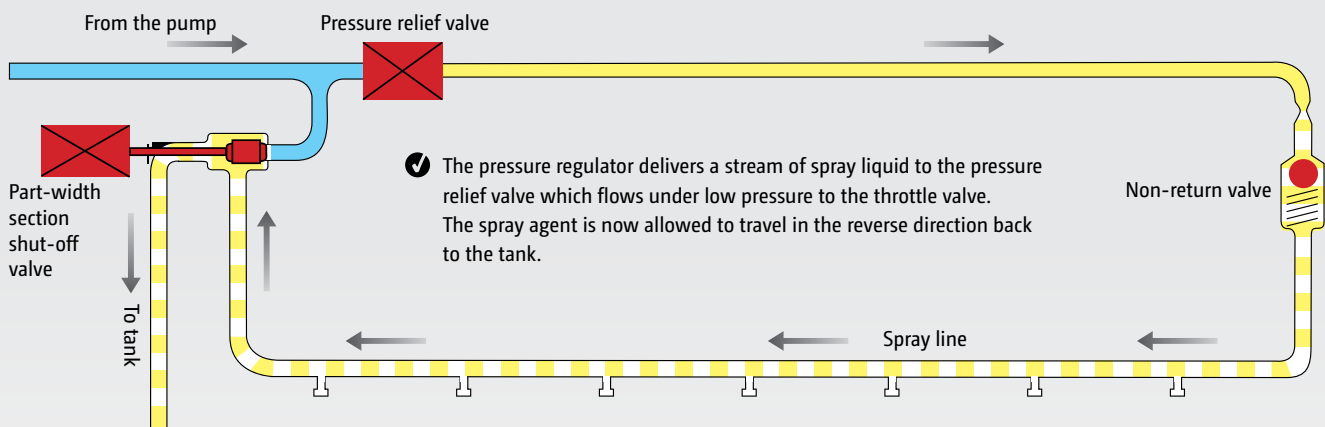


Electric boundary nozzle switching

For environmentally-friendly spray application at the field edge

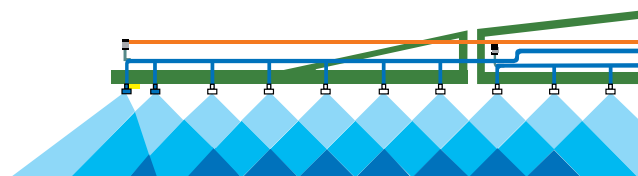


Additional nozzle switching

In order to extend the normal working width, an asymmetrical nozzle can also be switched on. This is particularly useful if the distances between tramlines are not precise enough.

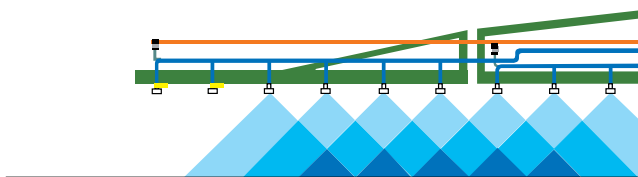

End nozzle switching

If a one metre buffer zone around the edge of the field needs to remain unsprayed due to distance constraints, end nozzle switching can be used.

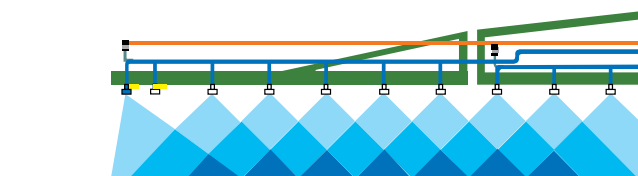

Boundary nozzle switching

For precision border spraying between two sensitive crops, the boundary nozzles can be used to make sure the spray pattern is accurately defined.



Options for every application




Liquid fertilising – safe and user-friendly

For coarse droplet distribution of liquid fertiliser, AMAZONE offers a variety of special nozzles.

In conjunction with the Super-S2 boom, separate drag hose equipment for risk-free, late fertilising is available. The self-contained aluminium profiles can be attached with a few hand clamps. Drag hoses offer a risk-free late top dressing with liquid fertiliser and stainless steel weights help keep the position of the drag hoses within the crop.



Drag hose with articulated joint

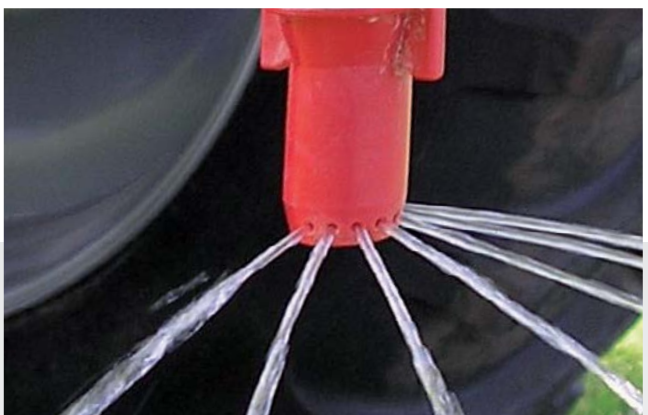

7 hole nozzle



Camera system for the rear of the UG trailed sprayer

The optionally available camera system is there to offer added safety when manoeuvring. This is ensured even in rain, twilight or in darkness via infrared LEDs and a heated lens. The high resolution, antiglare monitor is backlit and can also display two cameras at once.



LED boom lighting for Super-S2 booms

For flexible and efficient operation at twilight and in the dark, LED boom lighting is available.

Two far-reaching LED work lights, mounted in the middle of the boom, ensure excellent visibility of all the nozzles at a glance.

LED individual nozzle lighting for Super-S2 booms

Professional work lighting is today the basis of a flexible, output-increasing solution when operating in twilight and at night. Illumination of the spray fans ensures complete control of the nozzle function at just one glance.

LED individual nozzle lighting picks out each individual spray fan. An absolutely immediate assessment of their operation down to the very last nozzle on the boom can be made.





Technical data: UG Special and UG Super

Model	UG 2200 Special	UG 2200 Super	UG 3000 Special	UG 3000 Super
Actual volume (l)	2,400		3,200	
Fresh water tank (l)	280		400	
Boom width (m)	15 – 28			
Transport height (m)	3.30			
Transport length (m)	5.20 – 5.90			
Transport width (m)	2.40			
Unladen weight with Super-S2 boom (kg)	2,350 – 2,582	2,461 – 2,693	2,573 – 2,805	2,685 – 2,917
Pump equipment (l/min)	250	370	250	370
Max. suction capacity (l/min)	400			
Ground clearance	for every drawbar and tyre size 0.70 – 0.90 m			
Spraying height	0.50 – 2.20 m (with tyres Ø 1,565 mm)			
Operating pressure, max. (bar)	< 10			

Illustrations, content and technical data are not binding! Deviations of technical data are possible depending on the equipment.
The illustrations may deviate from the requirements for local road traffic regulations.



AMAZONEN-WERKE H. DREYER SE & Co. KG
P. O. Box 51 · 49202 Hasbergen-Gaste/Germany
Phone +49 (0)5405 501-0 · Fax +49 (0)5405 501-193